USER: INTELLIGENT OF MECHANICS FACTORY OF MECHANICS



No.	N a m e	No.	N a m e
1	Front Sight	9	Recoil Pad
2	Top Rail	10	Rear Sling Swivel
3	Rear Sight	11	Bolt
4	Magazine tube Cap	12	Carrier Latch
5	Forend	13	Hop-up Unit Cover
6	Bolt release catch	14	Forend Tube Assembly
7	Trigger	15	Front Sling Swivel
8	Safety Catch	16	Gas Tank











Safety Catch ON.



Safety Catch OFF.



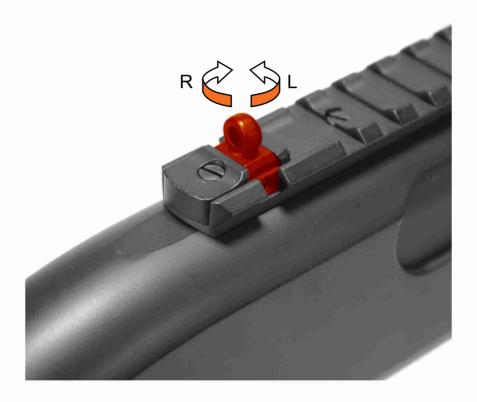

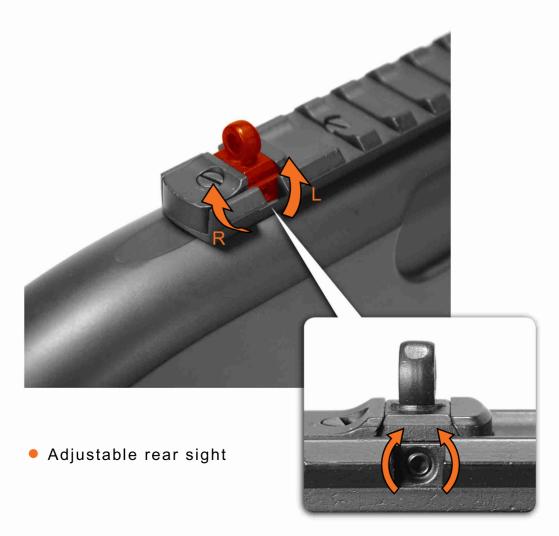






• Magazine tube cancarrie 2 Shell type magazine.




• Top rail in 1913 standard





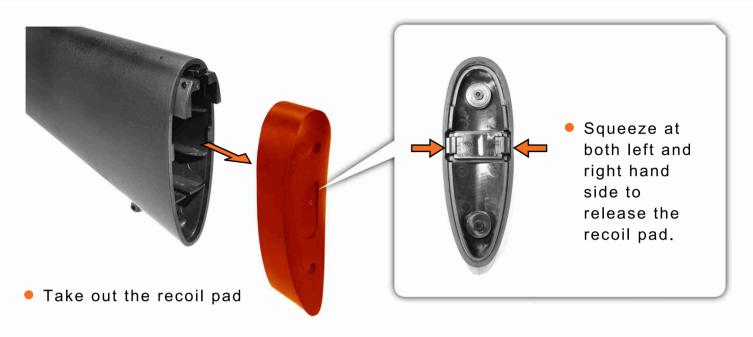

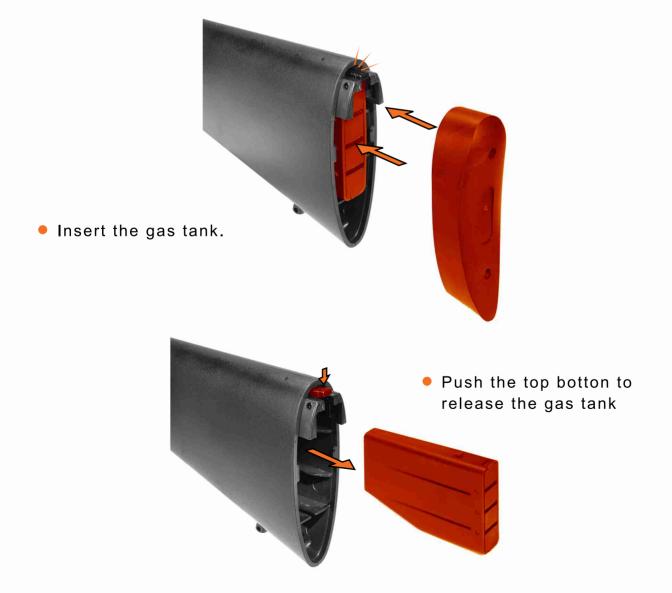

USER: INTELLIGENT MECHANICS FACTORY MECHANICS FA















 Push the bolt release catch to open the carrier latch and LOAD the shell type magazine.



Close the carrier latch after *LOADING*.



 Push the bolt release catch to open the carrier latch and UNLOAD the shell type magazine.








And all the way forward.







backward to open the Hop-up unit cover. Switch 3 or 6 rounds per each pump.

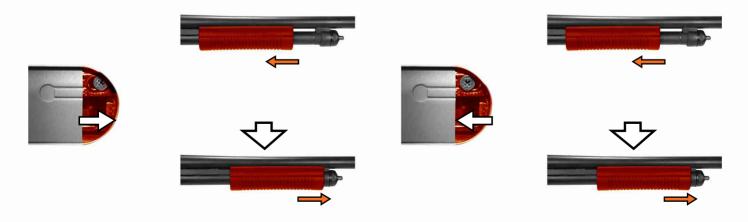

• 3 rounds position.

• 6 rounds position.